

Product Data

Wafer Type Valves


Brass

Gunmetal

PVC

Stainless Steel - Table D

Stainless Steel -ANSI/ASME

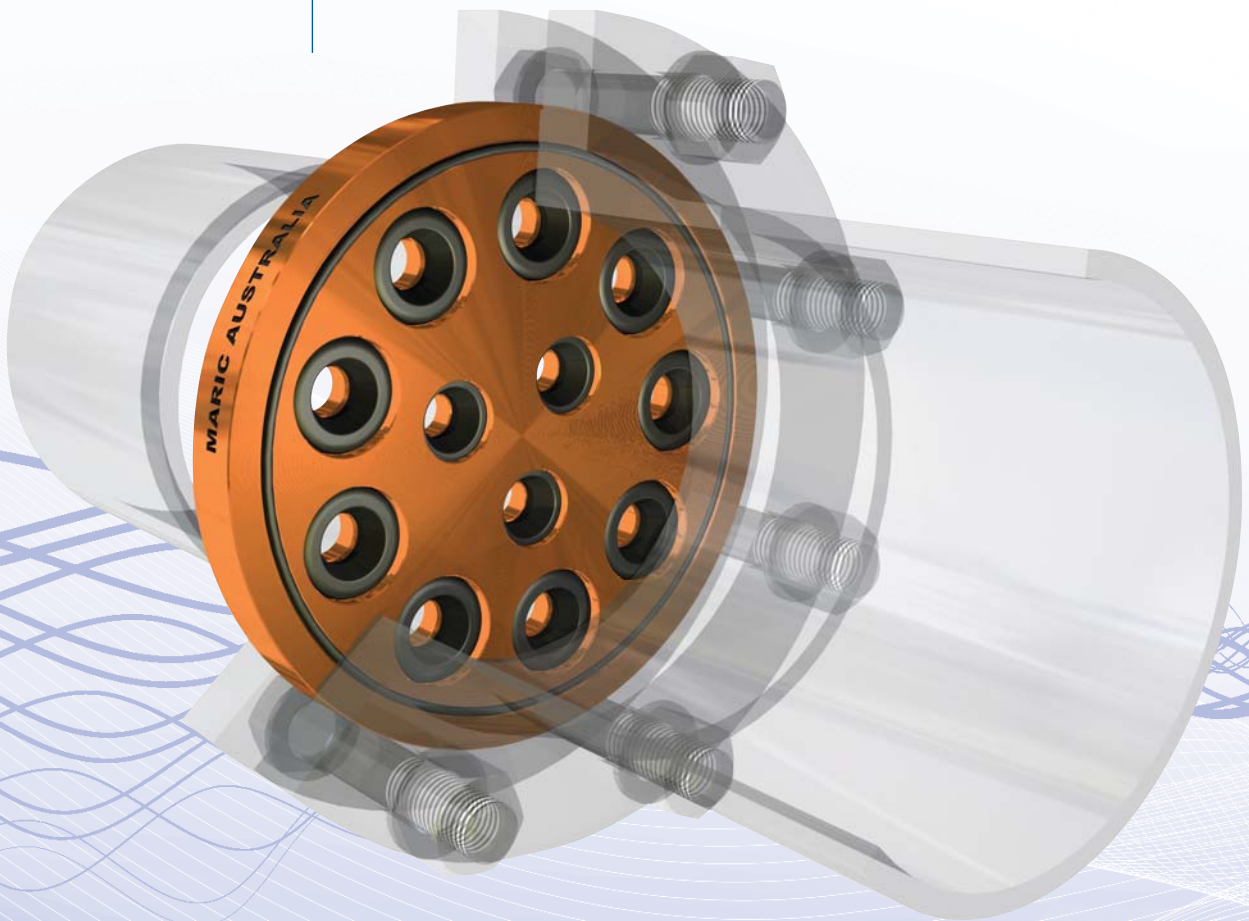

Maric Constant Flow Valves

Constant Flow Rate Regardless of Pressure



Est. 1963

Availability & Specifications – Maric Flow Control Valves

Designed for mounting between Table “D” pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
20mm	from 0.4 to 114 l/m	1
25mm	from 0.4 to 233 l/m	1
32mm	from 0.4 to 233 l/m	1
40mm	from 0.4 to 233 l/m	1
50mm	from 0.4 to 342 l/m	1 – 3



Dimensions & Weights

Nominal size	20	25	32	40	50
Diameter	61.0	71.0	75.0	86.0	98.0
Thickness	22.0	22.0	22.0	22.0	22.0
Approx Weight Kg	0.45	0.6	0.8	0.9	1.2

Standard Performance

Pressure Differential Range
Flow Rate Accuracy
Headloss
Available Flow Rates

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)

140 – 1000 kPa (Higher DP options available)

+/- 10%

140 kPa at rated flow. (At lower than rated flows headloss reduces significantly.)

.4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 2.8 / 3.2 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 342 lpm

Materials

Body
Sealing O’Rings

“DR” Brass to AS1567 alloy 352
 Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

Construction

Flange Specification

Valve assemblies comply to Australian Technical Standards ATS5200-037.1
 Suits standard table “D” flanges to AS2129 and AS4087 Class 14
 Alternative specs are available - Refer to Valve Selection Guide for additional info.
 Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly. Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.
 PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

Max Pressure Differential
Max Hydrostatic Pressure
Max Temperature
Compatible Control Rubbers

1500 kPa (for N6 and EP rubbers only)
 6000 kPa
 60°C for Nitrile control rubbers, 100°C for EPDM
 Standard Precision P (Non Standard LP, N6, EP, K, V, HF)

Specifying valves

When ordering these valves, please be sure to specify;

- Body size
- Flange specification (if other than Table D)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate

www.maric.com

Telephone:

08 8431 2281

(+61 8 8431 2281)

Facsimile:

08 8431 2025



Maric Constant Flow Valves

Constant Flow Rate Regardless of Pressure



Est. 1963

Availability & Specifications – Maric Flow Control Valves

Designed for mounting between Table “D” pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
20mm	from 0.4 to 114 l/m	1
25mm	from 0.4 to 233 l/m	1
32mm	from 0.4 to 233 l/m	1
40mm	from 0.4 to 233 l/m	1
50mm	from 0.4 to 342 l/m	1 – 3
65mm	from 0.4 to 456 l/m	4
80mm	from 0.4 to 699 l/m	3
100mm	from 0.4 to 1279 l/m	6
150mm	from 0.4 to 2320 l/m	12
200mm	from 114 to 4427 l/m	19
250mm	from 25 to 6058 l/m	26
300mm	from 114 to 8854 l/m	38



Dimensions & Weights

Nominal size	20	25	32	40	50	65	80	100	150	200	250	300
Diameter	61.0	71.0	75.0	86.0	98.0	111.0	130.0	162.0	219.0	276.0	336.0	386.0
Thickness	22.0	22.0	22.0	22.0	22.0	22.0	22.0	24.0	28.0	35.0	40.0	50.0
Approx Weight Kg	0.45	0.5	0.8	0.9	1.2	1.3	1.9	3.1	7.0	13.0	25.0	45.0

Standard Performance

Pressure Differential Range
Flow Rate Accuracy
Headloss
Available Flow Rates

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)

140 – 1000 kPa (Higher DP options available)

+/- 10%

140 kPa at rated flow. (At lower than rated flows headloss reduces significantly.)

.4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 2.8 / 3.2 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 8854 lpm

Materials

Body
Sealing O’Rings

LG2 or LG4 to BS1400
 Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

Flange Specification

Suits standard table “D” flanges to AS2129 and AS4087 Class 14
 Alternative specs are available - Refer to Valve Selection Guide for additional info.
 Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly. Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.
 PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

Max Pressure Differential
Max Hydrostatic Pressure
Max Temperature
Compatible Control Rubbers

1500 kPa (for N6 and EP rubbers only)
 6000 kPa
 60°C for Nitrile control rubbers, 100°C for EPDM
 Standard Precision P (Non Standard LP, N6, EP, K, V, HF)

Specifying valves

When ordering these valves, please be sure to specify;

- Body size
- Flange specification (if other than Table D)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate

www.maric.com

Telephone:

08 8431 2281
 (+61 8 8431 2281)

Facsimile:

08 8431 2025



Maric Constant
 Flow Valves

Constant
 Flow Rate
 Regardless
 of Pressure



Est. 1963

Availability & Specifications – Maric Flow Control Valves

Designed for mounting between Table “D” pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
20mm	from 0.4 to 114 l/m	1
25mm	from 0.4 to 233 l/m	1
32mm	from 0.4 to 233 l/m	1
40mm	from 0.4 to 233 l/m	1
50mm	from 0.4 to 342 l/m	1 – 3
65mm	from 0.4 to 456 l/m	4
80mm	from 0.4 to 699 l/m	3
100mm	from 0.4 to 1279 l/m	6
150mm	from 0.4 to 2320 l/m	12
200mm	from 114 to 4427 l/m	19
250mm	from 25 to 6058 l/m	26
300mm	from 114 to 8854 l/m	38



Dimensions & Weights

Nominal size	20	25	32	40	50	65	80	100	150	200	250	300
Diameter	61.0	71.0	75.0	86.0	98.0	111.0	130.0	162.0	219.0	276.0	336.0	386.0
Thickness	24.0	24.0	24.0	24.0	24.0	24.0	24.0	39.5	39.5	49.0	80.0	100.0
Approx Weight Kg	0.10	0.12	0.13	0.15	0.23	0.24	0.37	0.93	1.0	2.7	9.0	13.0

Standard Performance

Pressure Differential Range
Flow Rate Accuracy
Headloss
Available Flow Rates

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)

140 – 1000 kPa
 +/- 10%
 140 kPa at rated flow. (At lower than rated flows headloss reduces significantly.)
 .4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 2.8 / 3.2 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 8854 lpm

Materials

Body
Sealing O’Rings

Grey UPVC, Special grade to suit potable water requirements to AS4020
 Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

Construction

Flange Specification

Valve assemblies comply to Australian Technical Standards ATS5200-037.1
 Suits standard table “D” flanges to AS2129 and AS4087 Class 14
 Alternative specs are available - Refer to Valve Selection Guide for additional info.
 Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly. Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.
 PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

Max Pressure Differential
Max Hydrostatic Pressure
Max Temperature
Compatible Control Rubbers

1000 kPa or limited by Control Rubber type
 3000 kPa
 50°C
 Standard Precision P (Non Standard LP, EP, K, V, HF)

Specifying valves

When ordering these valves, please be sure to specify;

- Body size
- Flange specification (if other than Table D)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate

www.maric.com

Telephone:

08 8431 2281
 (+61 8 8431 2281)

Facsimile:

08 8431 2025



Maric Constant Flow Valves

Constant Flow Rate Regardless of Pressure



Est. 1963

Availability & Specifications – Maric Flow Control Valves

Designed for mounting between Table “D” pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
20mm	from 0.4 to 114 l/m	1
25mm	from 0.4 to 233 l/m	1
32mm	from 0.4 to 233 l/m	1
40mm	from 0.4 to 233 l/m	1
50mm	from 0.4 to 342 l/m	1 – 3
65mm	from 0.4 to 456 l/m	4
80mm	from 0.4 to 699 l/m	3
100mm	from 0.4 to 1279 l/m	6
150mm	from 0.4 to 2320 l/m	12
200mm	from 114 to 4427 l/m	19
250mm	from 25 to 6058 l/m	26
300mm	from 114 to 8854 l/m	38



Dimensions & Weights

Nominal size	20	25	32	40	50	65	80	100	150	200	250	300
Diameter	61.0	71.0	75.0	86.0	98.0	111.0	130.0	162.0	219.0	276.0	336.0	386.0
Thickness	22.0	22.0	22.0	22.0	22.0	22.0	22.0	24.0	24.0	28.0	32.0	40.0
Approx Weight Kg	0.45	0.6	0.7	0.9	1.2	1.2	1.6	2.7	5.0	11.0	19.0	31.0

Standard Performance

Pressure Differential Range
Flow Rate Accuracy
Headloss
Available Flow Rates

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)

140 – 1000 kPa (Higher DP options available)

+/- 10%

140 kPa at rated flow. (At lower than rated flows headloss reduces significantly.)

.4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 2.8 / 3.2 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 342 lpm

Materials

Body
Sealing O’Rings

316 Stainless Steel to ASTM484/A276
 Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

Flange Specification

Suits standard table “D” flanges to AS2129 and AS4087 Class 14
 Alternative specs are available - Refer to Valve Selection Guide for additional info.
 Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly. Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.
 PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

Max Pressure Differential
Max Hydrostatic Pressure
Max Temperature
Compatible Control Rubbers

2000 kPa (for N7 & E7 rubbers only)
 6000 kPa
 60°C for Nitrile control Rubbers - 100°C for EPDM - 200°C for Viton
 Standard Precision P (Non Standard LP, N6, N7, EP, E7, V, HF)

Specifying valves

When ordering these valves, please be sure to specify;

- Body size
- Flange specification (if other than Table D)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate

www.maric.com

Telephone:

08 8431 2281
 (+61 8 8431 2281)

Facsimile:

08 8431 2025



Maric Constant Flow Valves

Constant Flow Rate
Regardless of Pressure



Est. 1963

Availability & Specifications – Maric Flow Control Valves

Designed for mounting between ANSI 150 and ANSI 300 pipe flanges.

Sizes	flow rate ranges avail.	standard no. of control rubbers
20mm	from 0.4 to 114 l/m	1
25mm	from 0.4 to 233 l/m	1
32mm	from 0.4 to 233 l/m	1
40mm	from 0.4 to 233 l/m	1
50mm	from 0.4 to 342 l/m	1 – 3
65mm	from 0.4 to 456 l/m	4
80mm	from 0.4 to 699 l/m	3
100mm	from 0.4 to 1279 l/m	6
150mm	from 0.4 to 2320 l/m	12
200mm	from 125 to 4427 l/m	19
250mm	from 25 to 6058 l/m	26
300mm	from 125 to 8854 l/m	38



Dimensions & Weights

Nominal size	20	25	32	40	50	65	80	100	150	200	250	300
Diameter - ANSI150	57.1	66.6	76.2	86.0	104.8	123.9	136.6	174.7	222.3	279.4	339.7	409.6
Diameter - ANSI 300	66.7	73.1	82.6	95.3	111.2	130.2	149.2	181.0	250.8	308.0	361.9	422.3
Thickness	22.0	22.0	22.0	22.0	22.0	22.0	22.0	24.0	24.0	28.0	32.0	40.0
Approx Weight Kg	0.45	0.6	0.7	0.9	1.2	1.2	1.6	2.7	5.0	11.0	19.0	31.0

Standard Performance

Unless otherwise specified, **standard** Nitrile “**Precision**” type control rubbers are fitted giving the valve the following standard performance; (Refer also to available; Product Data – Control Rubbers – Precision)

Pressure Differential Range
Flow Rate Accuracy
Headloss
Available Flow Rates

140 – 1000 kPa
+/- 10%
140 kPa at rated flow. (At lower than rated flows headloss reduces significantly.)
.4 / .45 / .5 / .55 / .63 / .7 / .8 / .9 / 1.0 / 1.1 / 1.2 / 1.3 / 1.5 / 1.6 / 1.8 / 2.0 / 2.3 / 2.5 / 2.8 / 3.2 / 3.5 / 4.0 / 4.5 / 5.0 / 5.5 / 6.3 / 7.0 / 8.0 / 9.0 / 10 / 11 / 12 / 13 / 15 / 16 / 18 / 20 / 23 / 25 / 28 / 32 / 36 / 41 / 45 / 49 / 54 / 59 / 66 / 73 / 82 / 91 / 102 / 114 / 125 / 138 / 150 / 162 / 180 / 199 / 216 / 233 lpm up to 8854 lpm

Materials

Body
Sealing O’Rings

316 Stainless Steel to ASTM484/A276
Nitrile, potable water approved to AS4020 or EPDM or Viton if applicable

Flange Specification

Suits ANSI flanges (ASME/ANSI B16.5)
Alternative specs are available - *Refer to Valve Selection Guide.*
Standard Wafers are not full flange type i.e. flange bolts locate wafer concentrically and remain visible when viewing assembly.
Wafers are fitted with an o’ring in each face for sealing against smooth flat faced flanges. Gaskets will however be required where grooved, raised or rough cast face flanges are used.
PVC and Poly Stub Flanges note; Due to smaller I.D. of these flanges/pipes, optional spacers are often required to prevent restriction.

Max Pressure Differential
Max Hydrostatic Pressure
Max Temperature
Compatible Control Rubbers

2000 kPa (for N7 & E7 rubbers Only)
6000 kPa
60°C for Nitrile control rubbers - 100°C for EPDM - 200°C for Viton
Standard Precision P (Non Standard LP, N6, N7, EP, E7, V, HF)

Specifying valves

When ordering these valves, please be sure to specify;

- Body size
- Flange specification (ANSI 150 or otherwise)
- Body material
- Control rubber material and pressure differential range (if other than Precision)
- Flow Rate

www.maric.com

Telephone:

08 8431 2281
(+61 8 8431 2281)

Facsimile:

08 8431 2025

